
Darkflux


User's Manual

Thank you for purchasing a Hotone product
Please read this manual carefully to get the most out of your Darkflux

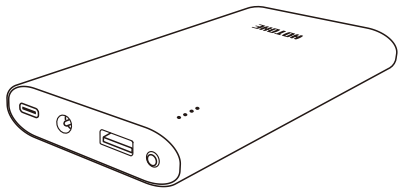

A Portable Power Bank
Designed for Musicians

Product Overview

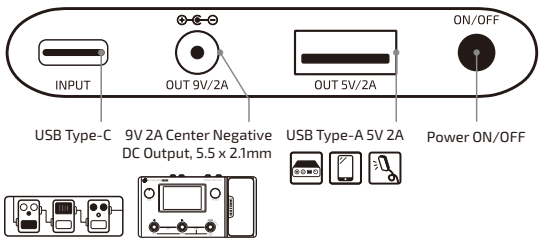

*The total current of the effects pedal group must be greater than 100mA, otherwise the unit will automatically shut down to ensure safety and conserve power.


Turning ON/OFF

Turning on: Press the ON/OFF button to turn the unit on. The power indicator light will come on.
Turning off: Press and hold the ON/OFF button for three seconds. The power indicator light will go off.

HOTONE

Charging

Use the power adapter to charge the unit. When charging, the display will correspond with the power intake:



Normal charging

Powel Level	LED 1	LED 2	LED 3	LED 4
0-25%	Blinking	Off	Off	Off
25-50%	On	Blinking	Off	Off
50-75%	On	On	Blinking	Off
75-96%	On	On	On	Blinking
Fully charged	On	On	On	On

Fast charging

Powel Level	LED 1	LED 2	LED 3	LED 4
0-25%	Blinking	Off	Off	Off
25-50%	Blinking	Blinking	Off	Off
50-75%	Blinking	Blinking	Blinking	Off
75-96%	Blinking	Blinking	Blinking	Blinking
Fully charged	On	On	On	On

1. The 5V output can be used normally when charging. The 9V output stops when charging.

Power Output

Connect a 5.5 x 2.1mm male-to-male DC cable or USB cable to your device to power out. When powering, the display will correspond with the power output:

Power Level	LED 1	LED 2	LED 3	LED 4
Undervoltage	Blinking	Off	Off	Off
0-25%	On	Off	Off	Off
25-50%	On	On	Off	Off
50-75%	On	On	On	Off
75-100%	On	On	On	On

1. When the output current is less than 100mA, the unit shuts down automatically to ensure safety and power conservation.
2. Connect the output port to automatically start powering. Individual devices will only power when the power button is turned on.
3. The USB 5V and 9V output ports support simultaneous powering when not charging.

Specifications

Model: XA-00009
Capacity: 37Wh 3.7V 10000mAh
Input: (USB-C) 5V ⎓ 2A 9V ⎓ 2A
12V ⎓ 1.5A
Operating temperature: 5°C-35°C

Battery type: Li-polymer battery
Rated capacity: 6800mAh (5V/2A)
Output: (USB-A) 5V ⎓ 2A
(5.5-2.1) 9V ⎓ 2A
Dimensions: 140*75*14.1mm

Charging time: approx. 4 hrs (data cable included, 18W adapter)
*Rated energy less than 74Wh/3.7V, in line with international aviation standards. Take it anywhere.

Caution:
Keep this unit away from fire. Use and store in a dry environment, free of water and moisture, which may cause a short circuit. The 9V interface is an output interface and cannot be used for charging.

HOTONE